

RECEIVED  
CENTRAL FAX CENTER T-004 P.014/025 F-110  
JUN 07 2007

Remarks

Claims 10 to 19 are in this application.


Claims 10 to 17 replace claims 1 to 6 and claims 18 and 19 replace claims 7 to 9 to more particularly conform with 35 USC 112.

A substitute description is being submitted in view of the many changes to conform to idiomatic English. Paragraph numbers have been used to allow for comparison to the application as published under US2006/0290523. No new matter has been introduced.

A marked-up copy of the description is attached to show the changes being made.

The claims have been revised to more particularly conform with 35 USC 112.

Respectfully submitted,

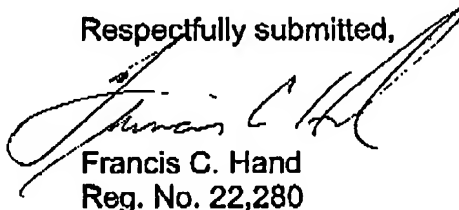

Francis C. Hand  
Reg. No. 22,280

CARELLA, BYRNE BAIN, GILFILLAN,  
CECCHI, STEWART & OLSTEIN  
Five Becker Farm Road  
Roseland, NJ 07068  
Phone: 973-994-1700  
Fax: 973-994-1744

#319645

USSN 10/544,279

## TECHNICAL FIELD

[0001] ~~The~~ This invention belongs relates to systems of ~~identification of~~ identifying remote objects by detection of gamma, X-ray and neutron radiations, in particularly particular, to systems ~~allowing to identify that allow the identification of~~ objects that are concealed or forbidden to transport, for example, at customs, border check-points etc. and the like.

## BACKGROUND ART

[0002] CZT detectors have been known from "X-Ray and Gamma Ray Detector High Resolution CZT Cadmium Zinc Telluride", web pages, amptek.com, Apr. 11, 2001, 8 pages and "Charge Trapping In XR-100T-CZT Detectors Application Note", web pages, amptek.com, Apr. 18, 2001, 15 pages. ~~The~~ A hand-held radiation detector, (CZT spectrometer) [1, 2], designed by Los-Alamos National Lab. ~~is known, uses a~~ Cadmium-Zink-Tellurium (CZT) semiconductor detector ~~is used in this detector~~ that is capable to ~~identify of identifying~~ gamma and neutron radiation of radioactive materials. In real time ~~he the detector~~ produces precise data for the ~~portative~~ portable device, Insensitive to a temperature variation of the environment. The detector includes a CZT chip installed in a housing with a charge-sensitive amplifier and an input-output unit for spectrum analyzing, as well as a multichannel analyzer with a microcontroller. In this device, ~~the a~~ a specialized software is used that links linking to a built-in microcontroller and monitoring operations in CZT spectrometer ~~is used.~~

[0003] A disadvantage ~~Disadvantage~~ of this device is the placement of a gamma and X-rays detector in one housing with a hand computer, which does not allow keeping

USSN 10/544,279

several sensing devices under the control ~~several sensing devices~~.

[0004] U.S. Patent 6,668,277 describes a ~~The multi-channel analyzer is known [3],~~ designed to conveniently gather, process, and distribute spectrographic pulse data. The multi-channel analyzer may operate on a computer system having memory, a processor, and the capability to connect to a network and to receive digitized spectrographic pulses. The multi-channel analyzer may have a software module integrated with a general-purpose operating system that may receive digitized spectrographic pulses for at least 10,000 pulses per second. The multi-channel analyzer may further have a user-level software module that may receive user-specified controls dictating the operation of the multi-channel analyzer, making the multi-channel analyzer customizable by the end-user. The user-level software may further categorize and conveniently distribute spectrographic pulse data employing non-proprietary, standard communication protocols and formats

[0005] The analog imperfection is a limitation of the functional capabilities of the final device that includes only reception, signal coding from the sensor and its transmission through a multichannel communication line, including Internet signal, corresponding to received signal spectrum.

[0006] Also known from U.S. Patent 4,550,381 is a ~~There is known~~ hand-holdable, battery-operated, microprocessor-based spectrometer gun that includes a low-power matrix display and sufficient memory to permit both real-time observation and extended analysis of detected radiation pulses. Universality of the incorporated signal processing circuitry permits operation with various detectors having differing pulse detection and

USSN 10/544,279

sensitivity parameters [4].

[0007] Utility Model, Russian Federation No 31001, shows as a prototype, a The system ~~ef- for~~ a remote radiation control and objects identification [5] containing a stationary detection system of fissionable and nuclear materials, connected with a relevant information monochannel with a personal computer having a display device, information and signalling recording system, with the capability of an information transfer by means of information channels, which is supplied with the videosystem device, connected with video images synchronization device and to fissionable and nuclear materials readings recorder (with a timer) ~~is taken as a prototype.~~

[0008] The imperfection of the known system is in its stationary state--only the objects passing through a window of the fixed system can be checked, and it is impossible for an authorized person to leave a place of observation, ~~having kept~~ thereby leaving the system without control. Moreover the system selected as the prototype, is closed and does not permit the ~~to~~ use of additional resources, and also to work simultaneously with different types of detectors.

#### DISCLOSE BRIEF DESCRIPTION OF THE INVENTION

[0009] The task of the present invention is to create a mobile and simultaneously high-capacity object detection and identification system according to its gamma, X-ray and/or neutron radiation. Moreover, invention task is to make it possible to develop a distributed multilevel system, for departmental usage, and an open system for common usage.

[0010] ~~This task is solved as follows: as per present invention,~~ Briefly, the invention

USSN 10/544,279

provides a device to detect gamma, X-ray and neutron radiations from an object device  
~~object detection and identification by their gamma X-ray and neutron radiations~~  
containing that includes a the detection unit [,.] and a preprocessing unit, with display,  
~~microprocessor, input unit and connecting unit with the expert system, the~~ The  
detection unit is created separately with a micro controller and a data transfer device[,.].  
The preprocessing unit is created with a display, microprocessor, input unit, a  
connecting unit for communicating with an expert system.[(-)] ~~supplied with the a~~  
channel for data acquisition from the detection unit, and ~~the preprocessor includes the a~~  
spectrums analysis unit.

[0011] ~~The problem put by is solved as follows: the communication link~~ the connecting  
unit for communicating with the expert system of objects identification is equipped  
additionally with ~~the a~~ channel for bilateral (i.e. two-way) transfer of audio and video  
information.

[0012] ~~The problem put by is solved as follows: the~~ A portable computer with connected  
radiotelephone or other mobile information reception and transfer device, for example,  
smart phone, or portable computer, is used as preprocessing device.

[0013] ~~The problem put by is solved as follows: the~~ preprocessing unit is supplied  
additionally with a video information input unit, for example, with a video camera.

[0014] ~~The problem put by is solved as follows: several~~ Several detection units are can  
be used, each of them is supplied with an identification marker and ~~they to~~ interact with  
the preprocessing unit.

[0015] ~~The problem put by is solved as follows: the~~ detection unit and preprocessing

USSN 10/544,279

device can be disposed in a common housing ~~are made in one housing,~~ and the detection unit is may be changeable.

[0016] ~~The problem put by is solved as follows: known~~ system of objects identification by gamma, X-ray and neutron radiation includes a detection unit and an information preprocessing unit of two hierarchic parts, one of which is the expert system, located in a networks, and they are interconnected by a communication link. ~~[[,--]] according~~  
According to the invention, the expert system is connected by a communication link with a national and/or departmental emergency warning system that is activated in case of emergency situations.

[0017] ~~The problem put by is solved as follows: in the expert system~~ may also include ~~there is additionally a person-expert in the field of objects identification.~~

[0018] ~~Device~~ The construction of the device in the form of ~~divided in space on~~ separate, spaced-apart ~~interconnected~~ modules that are interconnected by a communication link, where the detection unit is realized with a separate micro controller, ~~allows to receive such~~ provides implicit advantages, for example, ~~as~~ object identification directly in the place where it is, irrespective of identification place and object complexity. The size of the detection unit with a microcontroller can be small and it can be placed in the given place of control zones. Moreover, the departmental network allows the ~~executing~~ control of all authorized experts staff operation from one working place. Information processing capabilities in every specific situation rise considerably owing to porting of previously adjusted expert system. It is enough to have one central data file for all preprocessing devices servicing, that allows ~~to make~~ the making of data renew

USSN 10/544,279

and actualization for all users simultaneously.

**DESCRIBE THE FIGURES**

[0019] The invention is illustrated by drawings.

Fig. 1 schematically illustrates a detection system in accordance with the invention;

Fig. 2. schematically illustrates the interaction of the components of the detection system; and

Fig. 3 illustartes a block diagram of a preprocessing unit in accordance with the invention.

~~[0020] The version of system use in special testing zones is showed in FIG. 1. The scheme of devices interaction in objects registration and identification system is given in FIG. 2. Block diagrams of preprocessing unit are given in FIG. 3.~~

[0021] Objects Referring to Fig. 1, the objects registration and identification device includes the detection unit (DU) 1, preprocessing unit (PPU) 2 with a display and input unit, and departmental expert system (DES) 3. The devices are connected in a local network (LN). The expert system can be located in a open network, for example, an open expert system in Internet (OES) 4. The system can contain national or other state or intergovernmental system of emergency warning (NSEW) 5. When the system is used at ~~the~~ a customs terminal, the detection units 1 can be installed in the check points 6, passengers passages (~~green corridor~~) 7 and in places of transport thoroughfare 8. ~~At that the~~ The preprocessing unit 2 is located at where there is an authorized person (not shown).

USSN 10/544,279

Referring to Fig. 3, ~~the~~ The preprocessing unit 2 includes display unit D 9 and information input device (ID) 10, which can be realized as keyboard or graphical input (graffiti); processor (P) 11 and interface units (IU) 12. There is specialized software in P, which carries out the following actions:

~~THE BEST MODE CONTEMPLATED~~

[0022] Selection performance parameters (search, measurement and accumulation of scintillation spectrums);

[0023] Identification of a connected DU 1 under its identification number;

[0024] Information interchange with DU 1 and information output in D 9;

[0025] Objects identification according to accumulated scintillation spectra;

[0026] Information exchange through IU 12 with exchange interfaces of Blue Tooth or WI-FI with DES usage or through GSM with GPRS and OES usage.

[0027] The device is supplied with a unit of the wireless link 13 with the detection units 1 (for example, IrDA or Blue Tooth) and connection unit 14 (for example, GSM) with DES expert system 3 or OES 4. Preprocessing unit 2 can include a scanner (SC) 15 and information video-audio input unit (VAU) 16.

[0028] The device and system work in the following way.

[0029] The detection unit 1 can be used as ~~the~~ an independently operating device supplied with the microprocessor controller and information transfer devices, and also together with PPU device 2 (which can be any of portable devices (Mobile Device)—smart phone, notebook, communicator etc.). DU 1 should be handled by persons ~~taking a control of~~ monitoring for gamma, X-ray and neutron radiation sources (RS), or be



USSN 10/544,279

installed in the specially assigned places. These inspectors should stay in special control zones (customs and/or frontier zones) or in supposed places of RS occurrence (airports, railway or sea-ports, places of people gathering, control check points of materials, foodstuffs etc.).

[0030] Registration of gamma, X-ray and neutron radiation in the search mode is carried out in zones, in which joint action with additional equipment applied for RS check in these zones is possible: transport, foot-passengers or luggage monitors. ~~At~~ Upon determination in an RS control zone, ~~the~~ a detection signal is transmitted over transmission channels to the preprocessing unit/units 2, where automatic initial identification of this source with the help of PPU 2 Intrinsic computing resources occur. If the user is not able at his own to make a decision about the danger of the arisen situation or there are no PPU computing resources 2, for example, the received spectrum is absent in the CPC database, then the user can contact ~~to~~ the higher hierarchic expert system (by local network when working with the departmental expert system DES 3 or by GPRS or IP when working with expert system located in common user network OES 4). In this case, the expert system starts to control the user's actions, sending the instructions to him and receiving the results of his actions (measured values, accumulated spectrums, etc.). The obtained data are processed by DES 3 or OES 4 and are returned as user instructions for additional monitoring or RS identification. All user actions are saved in the database and can be inspected by the expert after addressing to him. If there are not enough DES 3 resources 3, the system connects with the expert in the field of objects identification, which can demand

USSN 10/544,279

additional actions or information from the user, including information on the RS over video channel.

[0031] Structurally, the OES or DES are constructed identically, and differ only by arrangement (or in corporate (local) DES network or in OES Internet) and by data and information bases. By ~~the~~ request, the user (authorized person) gets instructions from OES or DES, following which a decision on the further actions is made. In the case of non-typical situations, when OES or DES are not able to make a decision, the experts from crisis centers are linked up to the operation, and having analyzed all user actions and theirs results, direct further actions and make a decision on the arisen situation hazard.

[0032] In a DU 1 there is a built-in honker, which can be used independently (without PPU) or can be switched--off at the command of PPU. In this case, the honker ~~built-in in~~ PPU will be used for an audio alarm.

[0033] The DU 1 with PPU 2 is located at the persons exercising control of the detection process automation, searching, localization, measuring, initial identification of gamma, X-ray and neutron radiation sources and checking connection with higher hierarchic system.

[0034] In the case of critical situations, for example, when the radiation permissible level is exceeded, or object forbidden to transportation is identified, DES automatically contacts with ENSEW 5. In this case, the authorized persons have duty regulations that ~~provide for providing object~~ immediate localization and an immobilization of the object.

[0035] The additional usage of a scanner, for example, for scanning a bar code, makes

USSN 10/544,279

it possible for an authorized person to increase input speed of the standardized information indicated by a bar code.

[0036] The opportunity of linking in the PPU 2 and DU 1 in one housing allows an authorized person to localize and check objects in any place, where it is difficult to install the stationary detection units. Owing to that fact, the system mobility is considerably improved. Moreover, the replacement of one detector in the PPU construct by another, allows readjusting of the device quickly to ~~the other~~ another radioactive radiation type. Thus, the wire less communication of a DU 1 and PPE 2 allows to replace the replacement of sensors without any wires commutation.

[0037] The use of the Usage Internet for an open expert system arrangement allows to ~~considerably save users considerable savings in the user's~~ material resources during system installation in control zones. In this case, the user purchases only detection units and preprocessing units, and can use computing resources in a common user network. At that, the open expert system can operate on a commercial basis.

[0038] Thus, usage of all characteristics allows ~~to solve~~ a solution to the set problem—to create the mobile and simultaneously powerful enough objects registration and identification system.

[0039] The technical documentation is prepared and the prototype models with smartphone Mitac Mio 8380 are made.

~~[0040] The sources of information that were taken into consideration during expertise:~~

~~[0041] 1. "X-Ray and Gamma Ray Detector High Resolution CZT Cadmium Zinc~~

USSN 10/544,279

~~Telluride", web pages, amptek.com, Apr. 11, 2001, 8 pages.~~

~~[0042] 2. "Charge Trapping in XR-100T CZT Detectors Application Note", web pages, amptek.com, Apr. 18, 2001, 15 pages.~~

~~[0043] 3. U.S. Pat. No. 6,668,277, G 06 F 013/00, 2003.~~

~~[0044] 4. U.S. Pat. No. 4,550,381, G 01 S 13/74, 1985.~~

~~[0045] 5. Patent on utility model, Russian Federation No 31001, G 01 T 1/167, 2003 (prototype).~~